




SuperVue Series

960H | 700TVL | TRUE WDR

Features

- SuperVue 960H Double Scan CCD
- Ultra High Resolution 700TVL
- Built-in 2.8 ~ 12mm Varifocal lens with auto iris
- 36 IR Leds
- True WDR (Wide Dynamic Range)
- ICR, 3DNR, Sense-up, OSD
- Smoked Vandal proof Dome
- Dual Voltage (24V AC / 12V DC)
- Waterproof(IP68)

Dimensions

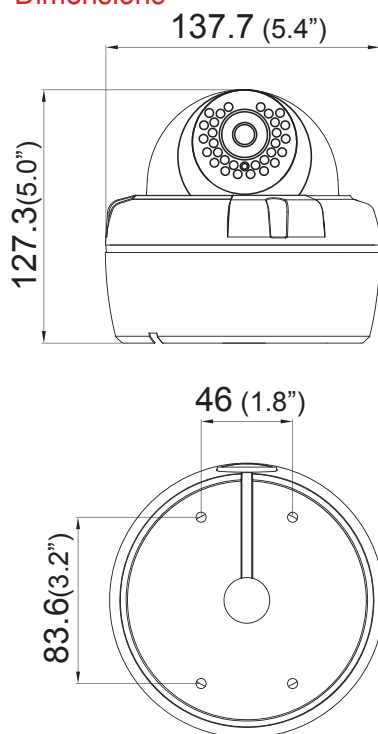

Specifications

MODEL	VKR-V455
IMAGE SENSOR	1/3" 960H Double Density IT CCD
EFFECTIVE PIXEL	976(H) x 494(V)
SCANNING SYSTEM	2:1 INTERLACE
SYNCHRONIZATION	INTERNAL
HORIZONTAL RESOLUTION	750TV LINES
VIDEO OUTPUT	COMPOSITE (1.0Vp-p/75Ohm)
S/N (Y SIGNAL)	52dB (AGC off, Weight on)
LENS	2.8~12mm DC Auto Iris Lens (ICR)
ELECTRONIC SHUTTER	1/60 ~ 120,000sec
SCENE SELECT	FULL AUTO / INDOOR / OUTDOOR / BACKLIGHT / ITS / CUSTOM
WDR	LEVEL Adjustment
BACKLIGHT COMPENSATION	BLC / HSBLC / OFF
WHITE BALANCE	ATW(1,800°K ~ 10,500°K)/PUHS/USER1,2/MANUAL/PUSH LOCK
DAY & NIGHT	DAY / AUTO1 / AUTO2 / NIGHT
PRIVACY MASKING	ON / OFF (Programmable 15 zones)
DNR	2DNR+3DNR(LEVEL Adjustment)
SMART IR	LEVEL Adjustment
SENS UP	Auto
MOTION	4 REGIONAL MD
DIGITAL EFFECT	OFF / V-FLIP / MIRROR / ROTATE
IR LED	36 IR Leds
INPUT VOLTAGE	DC 12V(±10%) / AC 24V DUAL VOLTAGE
HEATER OPERATION SPECIFICATION	INTERNAL OPERATING TEMPERATURE OFF : 20° / ON : -20°
POWER CONSUMPTION	HEATER OFF DC IR OFF : 150mA(±10%) / IR ON : 370mA (Max)
	HEATER OFF AC IR OFF : 230mA(±10%) / IR ON : 410mA (Max)
	HEATER ON DC IR OFF : 270mA(±10%) / IR ON : 490mA (Max)
	HEATER ON AC IR OFF : 360mA(±10%) / IR ON : 510mA (Max)
OPERATING TEMP/ HUM	-10℃ ~ +50℃ / MAX 90% RH
STORAGE TEMP/ HUM	-20℃ ~ +60℃ / MAX 90% RH