



Lite HD-IP


2.8~12MM | 3MP | Day&Night ICR

IR Bullet Camera

Features

- 3MP (2048×1536) Real time recording
- Max.re solution: 2048 x 1536
- ICR infrared cut filter removal for day/night function
- 2.8-12mm Motorized Lens
- 150ft IR night vision range
- 3D DNR, Digital WDR
- Support ROI
- Support CVBS video out, dual way audio
- DC 12V / PoE power
- Support smart phone, iPad, remote monitoring
- Support P2P

Dimensions

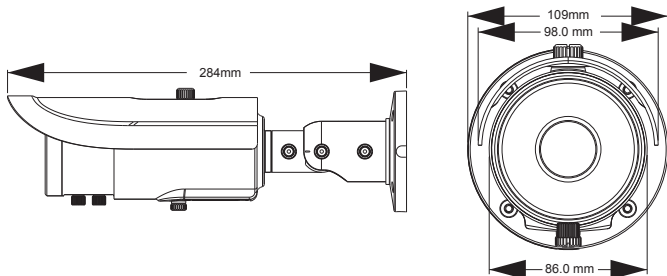

Available Accessories



Specifications

Model	VIC-330AB21M	
Camera	Image sensor	1/3"CMOS
	Image pixels	2048x1536
	Electronic shutter	1/25s ~ 1/100000s
	Auto iris	fixed iris
	Min.illumination	0lux (IR LED ON)
	Auto back focus	Auto/manual
	Lense	2.8-12mm
	Mount type	Φ14mount
	Day/Night mode	ICR IR filter
	WDR	digital
	Noise Reduction	2D/3D digital noise reduction
Image	Compression	H.264 / MJPEG
	H.264 compression	Baseline Profile / Main Profile / High Profile
	Encode	VBR/CBR
	Quality	VBR 5 level , CBR no limit
	Bit rate:	64Kbps ~ 8Mbps
	Resolution:	3MP (2048×1536), 1080P (1920×1080), 720P (1280×720), D1, CIF, 480x240
	Frame rate:	3MP (1~30fps) / 1920x1080 (1~30fps) 1280x720 (1~10fps) / D1 (1~30fps) / CIF (1~30fps) D1 (1~30fps) CIF (1~30fps) / 480x240 (1~30fps)
	Image config.	ROI, Saturation, Brightness, Chroma, Contrast , WDR, Sharpness, NR (Via IE and client end)
	Audio compression	G711A/U
	ROI	Support ROI Configuration for each stream independently
Interface	Internet	RJ45
	Video out	CVBS video out (BNCx1)
	Audio	dual way audio (MIC IN×1, MIC OUT×1)
	Storage	support TF card, up to 64GB
	RS485	Support
	Alarm in	1CH
	Alarm out	1CH
Function	Remote surveillance	IE browser, CMS remote control
	Online user	10 users, support multi-stream real time transmission.
	Network protocol	TCP/IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, IPV6
	Interface protocol	ONVIF, GB-T/28181-2011
	Storage	TF card local storage, Network remote storage
	Smart alarm	Motion alarm, Sensor alarm
	PTZ	RS485x1
	PoE	Support
	Night vision range	30-50 m
	Water proof	IP66
	Others	Power supply
Working environment		-40°C ~ 50°C, 10% ~ 90% humidity