



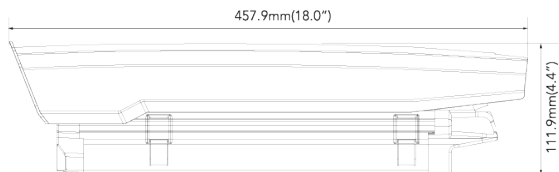

Features

- 3MP H.265/H.264, LPR Camera
- True D/N ICR
- 3DNR
- True WDR
- IP66 ingress protection
- PoE/DC12V
- Mount not Included (Recommend HM-205)

Dimensions



Accessories



Actual Captured Images



Specifications

DESCRIPTION	VIC-3LPR65
Image Sensor	1/3" CMOS
Effective Pixels	2048 x 1536
Electronic Shutter	1/25s ~ 1/1000000s
Min. Illumination	Color: 0.05lux@F1.2, AGC ON, B/W: 0lux with IR
Lens	5.0~50 mm MP DC Auto Iris Varifocal Lens (ICR)
Lens Angle	Horizontal: 50°, 80° ~ 38° (-FZ)
Lens Mount	CS Mount, Φ14 Mount (-FZ)
WDR	Digital WDR
BLC	2D / 3D DNR
DNR	H.264 BL / MP / HP, MJPEG
Video Compression	G.711A / G.711U
Audio Compression	64Kbps ~ 10Mbps
Bit Rate	VBR / CBR
Encode Mode	Five Levels under VBR ; Freely Adjustable under CBR
Image Quality	3MP (2048 x 1536), 1080P (1920 x 1080), 720P (1280 x 720), D1, CIF, 480 x 240
Resolution	3MP (1~30fps) / 1920 x 1080 (1~30fps) / 720P (1~30fps) / 720P (1~30fps) / D1 (1~30fps) / CIF (1~30fps) / D1 (1~30fps) / 480 x 240 (1~30fps) / CIF (1~30fps)
Image Setting	ROI, Saturation, Brightness, Hue, Contrast, WDR, Sharpness, DNR, etc.
Network	RJ45
Card Storage	N/A
Remote Monitoring	Browser, CVMS, Mobile CVMS
Supported Browsers	IE / Chrome / Firefox / Safari
Online Connection	Max. 10 Online Users
Protocol	TCP/IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP
Connection Protocol	ONVIF
Storage	Network Remote Storage
Day & Night	True
IR Distance	300ft.*
IR LED (Count)	6 AIB™ IR LEDs
Weatherproof	IP66 (Weatherproof)
Angle Adjustment	Horizontal: 0° ~ 77°, Vertical: 0° ~ 360°, Rotation: 0° ~ 360°
Power supply	DC 12V/PoE
Power Consumption (IR Off)	<5W
Power Consumption (IR On)	<7W
Working Environment	-22°F ~ 140°F (-30°C ~ 60°C), 10% ~ 90% Relative Humidity

*IR distance range varies depending on the environment