




Lite HD-IP

3.6MM | 4MP | Day&Night
ICR

Features

- 1/3" 4M BSI CMOS Sensor
- H.265/H.264 Encoding, Max Resolution 2688*1520
- 2D/3D DNR, PSW Protection, Free P2P
- Anti-fog, Anti-flicker, Encoding of eight ROIs
- iPhone, iPad & Android Platforms Supported
- Defect pixel correction and digital image stabilization
- Input Voltage: DC12V(POE)

Dimensions

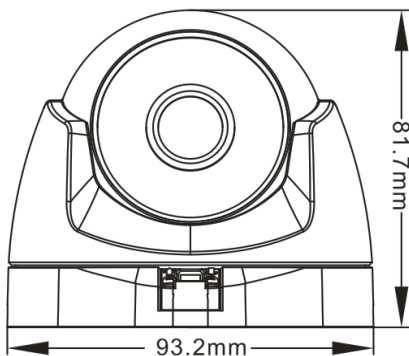

Specifications

| Camera | |
|---------------------------|--|
| Sensor | 1/3" 4MBSI CMOS Sensor |
| Min Illumination | 0.01Lux@F1.2 (0Lux,IR on) |
| S/N | ≥50dB(AGC OFF) |
| WDR | D-WDR |
| IR LEDs | 2 pcs IR Array |
| IR Range | 30m |
| Lens | 3.6mm |
| Current | 480mA |
| Power Consumption | <6W |
| Weight | 320g |
| IP Rating | IP66 |
| Interface | |
| Ethernet | RJ45 10M/100M |
| Audio Input | 1CH Audio Input |
| Video Encode | |
| Encoding | H.265, H.264 |
| Resolution(Main Stream) | 2688*1520, 1-15 fps |
| | 2048*1536, 1-25(30)fps |
| | 1920*1080, 1-25(30)fps |
| | 1280*720, 1-25(30)fps |
| Resolution(Sub Stream) | 1280*720, 1-25(30)fps |
| | 640*480, 1-25(30)fps |
| | 320*240, 1-25(30)fps |
| Resolution(Mob Stream) | 640*480,1-25(30)fps,320*240,1-25(30)fps |
| Video Compression | 64kbps-8000kbps Continuously Adjustable, CBR/VBR Supported |
| Subtitle Overlay | Channel Name, Date&Time, Stream Information Overlay, Overlay Position Adjustable |
| Data Transfer and Storage | |
| Data Storage | Video, Image |
| Storage Mechanism | Manual, Auto(Loop, Timing, Alarm Switch Input, Motion Detection) |
| Alarm Data Transfer | FTP, E-mail, Brower, Management Software |
| Network Protocol | HTTP,TCP,ARP,RTSP,RTP,UDP,RTCP,SMTP,FTP,DHCP,DNS, DDNS,PPPoE,IPv4, UPnP,NTP |
| ONVIF Protocol | ONVIF 2.4 Supported |
| Client-side Browse | IE,firefox |
| General Parameters | |
| Input Voltage | DC12V±10% |
| Working Temperature | -40℃~+50℃ |
| Working Humidity | <90%RH(No Condensation) |