

Sensor 1500TVL Min. illumination BLC WDR



Day&Night Auto WB Sync AGC Water-proof

4-In-1(TVI/AHD/CVI/CVBS)

5MP | 3.6MM | TRUE WDR


IR Dome Camera

Specifications

Features

- 5MP@20fps/4MP@30fps image, high resolution, true color
- AHD / TVI / CVI / CVBS standard and lossless video output
- Up to 1500 TVL resolution
- CMOS progressive scan, perfectly capture the moving object
- True WDR
- Support OSD menu
- High speed, long distance and real time transmission
- Auto color to B / W at low illumination
- Support ICR switch, true day / night
- Support noise reduction function
- 10 ~ 20m IR night view distance
- IP66 ingress protection
- Support COC

Dimensions

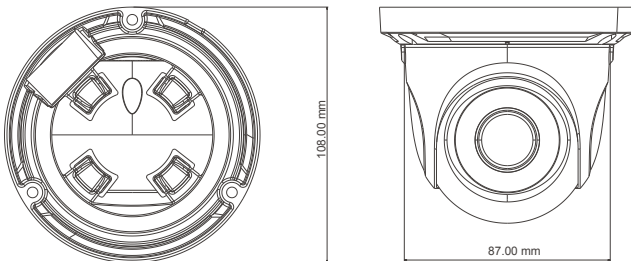

Accessories



Specifications	Model	VTC-5SE3
Camera		
Image Sensor		1 / 2.5 "CMOS
Resolution		5MP / 4MP
Image Size		2592 x 1944
Video Output		AHD / TVI / CVI / CVBS
Image System		PAL / NTSC
Electronic Shutter		Auto; 1 / 25s ~ 1 / 100000s (PAL); 1 / 30s ~ 1 / 100000s (NTSC)
IR Distance		10 ~ 20 m
Frame Rate		5MP@20fps/4MP@30fps
Min. Illumination		Color : 0.001 lux@F1.2, AGC ON; B/W : 0 lux with IR
Lens		3.6 mm (2.8 mm optional)
Lens Mount		M12
S / N Ratio		≥52dB (AGC OFF)
Ingress Protection		IP66
Functions		
Function Control		OSD (COC Control)
Day & Night		ICR
WDR		Yes (120dB)
Digital NR		Yes (2D DNR)
AGC		Yes
Auto White Balance		Yes
BLC		Yes
Edge Brightness Compensation		Yes
Defogging		Yes
HLC		Yes
Sharpness		Yes
Mirror Image		Yes
Smart IR		Yes
Image Setting		Yes
Defect Correction		Auto / Manual
Language		English and Chinese
Angle Adjustment		Any angle
Others		
Power Supply		DC12V (± 10%)
Power Consumption		IR OFF : < 1W; IR ON : < 3W
Working Environment		- 20 °C ~ 50 °C, 10 % ~ 90 % (relative humidity)
Dimensions (mm)		Φ 87 x 108