




MV-8S4B21

2MP1080P HD-SDI IR Bullet Camera

Backwards Compatible with HD-SDI using Signal Selection!
OSD Menu Control for Ex-SDI or HD-SDI Signal Selection!

	EX-SDI : 270Mb/s 1080p	HD-SDI: 1.485Gb/s 720p	HD-SDI: 2.97Gb/s 1080p
Belden RG6 [82248] 18AWG Cable	375m (1230ft)	185m (606ft)	120m (393ft)
Belden RG59 [543945] 20AWG Cable	330m (1082ft)	160m (524ft)	100m (328ft)
Belden 1426A [RG59] 20AWG Cable	330m (1082ft)	160m (524ft)	100m (328ft)
Belden 1855A 23AWG Cable	235m (770ft)	115m (377ft)	75m (246ft)

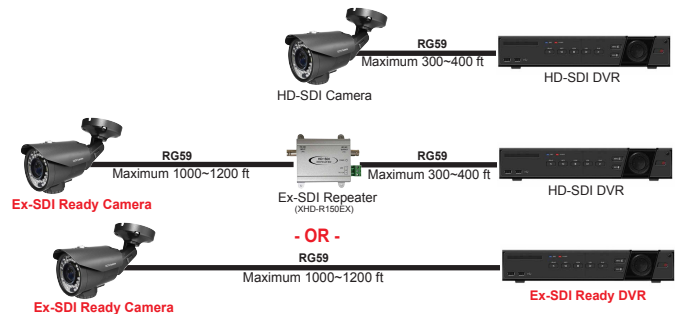


**2MP | 1080P | TRUE D&N
ICR**

Features

- MegaVue 2MP, 1080P, HD-SDI
- Built-in 2.8~ 12mm Megapixel lens
- 48IR (150ft)
- ICR, DWDR, 3DNR, Sense-up, OSD
- Cable Through 3-Axis bracket
- Waterproof(IP68)
- Dual Voltage (24V AC / 12V DC)

Dimensions

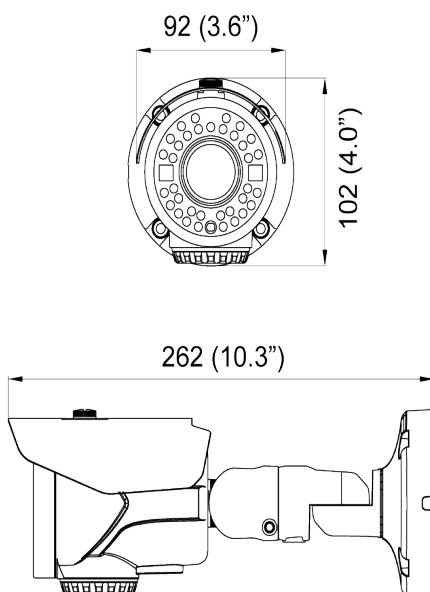

Specifications

Model	MV-8S4B21
IMAGE SENSOR	1/2.9"2.1MEGA PIXEL SONY EXMOR CMOS
EFFECTIVE PIXEL	1936 (H) x 1097 (V)
SCANNING SYSTEM	PROGRESSIVE
VIDEO OUTPUT	1 x HD-SDI, 75Ω COMPOSITE
HORIZONTAL RESOLUTION	MORE THAN 50dB
Min. ILLUMINATION	0.02LUX (SENS-UP x30)
S/N (Y Signal)	MANUAL
LENS	2.8~12mm MEGAPIXEL LENS (ICR TYPE)
ELECTRONIC SHUTTER	OFF/AUTO(1/30~1/50,000)FLK MANUAL(x2~x30)
BACKLIGHT COMPENSATION	OFF /BLC / HSBLC
WHITE BALANCE	AWC / SET KEY / MANUAL- BLUE,RED(1~100) / INDOOR / OUTDOOR
DAY & NIGHT	AUTO / EXT / B/W(IR SMART) / COLOR
PRIVACY MASKING	ON / OFF (PROGARAMMABLE 8 ZONES)
NOISE REDUCTION	2DNR/3DNR LEVEL(0~100) ADJUSTMENT / SMART NR
ACCE	OFF / LOW / MIDDLE / HIGH
DEFOG	LOW / MIDDLE / HIGH / OFF
DIGITAL ZOOM	OFF/ON (x2 ~ x62) / OFF
SENS UP	OFF / x2~x30
DIGIAL EFFECT	OFF / V-FLIP / MIRROR / ROTATE
DEFECT	LIVE DPC (ON, OFF, AUTO)
IR LED	48 IR LED
INPUT VOLTAGE	DC 12V(±10%) / AC 24V DUAL VOLTAGE
POWER CONSUMPTION	IR OFF : 120mA(±10%) / IR ON : 350mA(±10%)
OPERATING TEMP. / HUM.	-10° C~ +50° C / MAX 90% RH
STORAGE TEMP / HUM	-20° C ~ +60° C / MAX 90% RH