




HDCVI/HDTVI/AHD

1080P | 3.6MM | TRUE WDR

### Features

- 1/2.9" 2MP SONY Exmor CMOS
- 100 dB ROI Window WDR
- Auto Defog, HLC, Privacy mask, motion detection, 32X Sense up
- 2D/3D DNR, anti-ghost effect
- HDCVI/HDTVI/AHD(output Selectable from OSD Switch) & CVBS output simultaneously
- Multi Languages OSD Control from Recorder
- DC12V
- 3.6mm Fixed Lens
- IP66 ingress protection

### Dimensions

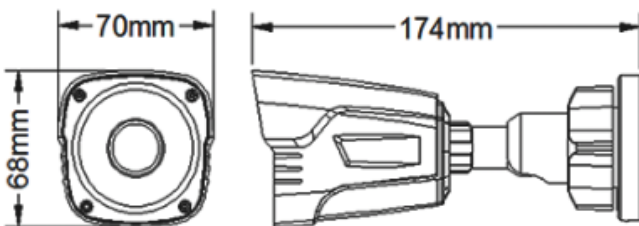

### Specifications

Image Sensor	1/2.9" 2.0MP SONY Exmor CMOS
Effective Pixels	1945(H) × 1097 (V)
Resolution	Digital: 1920×1080p(1080p/30fps) Analog: 700TVL
S/N Ratio	≥50dB (AGC Off)
Min. Illumination	COLOR: 0. 1Lux@(F2.0, AGC ON) B&W: 0.001Lux@(F2.0, AGC ON)
Scanning System	Progressive
Video Output	HD-Analog: HD-CVI (TVI AHD)(1080P 、 720P) Analog: 1Vp-p Composite Output (75Ω/BNC)
Day&Night	EXTERN,COLOR, B&W,AUTO
White Balance	Auto
OSD	English / Chinese
Defog	OFF/ON
WDR	OFF/LOW/MIDDLE/HIGH
Privacy Mask	ON/OFF (16 Areas)
Motion Detection	ON/OFF (4 Areas)
IR LED	2pcs IR Array
Lens	3.6mm
IR Range	30m
Power Supply	DC12V±10%
Power Consumption	< 4.5W
Weight	380g
IP Rating	IP66
Storage Temperature	-20℃~60℃
Working Temperature/Humidity	-10℃ ~60℃, Humidity 90% or less (non-condensing)